



SILVER WEIBULL®

Batch Centrifugal SW-1250BE/BEG SW-1500BE/BEG

- Precise charging control
- Effective Wash system
- "Clean Sweep" Plough system
- Unique control software
- Oil mist lubrication
- State of the art drive system



MODEL		Basket dimensions A x B x C	Max Speed rpm	Geometric Charge (kg)	Practical Charge (kg)	Bottom Cover Type
SW-1250/BE/BEG	mm inch	1320 x 1067 x 232 52 x 42 x 9	1250	1250	1375	P** / R*
SW-1250/BE/BEG	mm inch	1450 x 1067 x 202 57 x 42 x 8	1225	1250	1375	P** / R*
SW-1500/BE/BEG	mm inch	1450 x 1067 x 255 57 x 42 x 10	1150	1500	1650	P** / R*




Standard Configuration

The Silver Weibull Batch Centrifugal can be delivered in Battery configuration.

The standard unit is equipped with AC/PWM (IGBT) electrical drive.

Controls are state of the art PLC to allow complete centrifugal operation and flexibility in centrifugal sequencing to assure peak efficiencies during all modes of operation.


Silver Weibull Batch Centrifugals can also be used to separate other crystalline products e.g. dextrose, fructose etc.

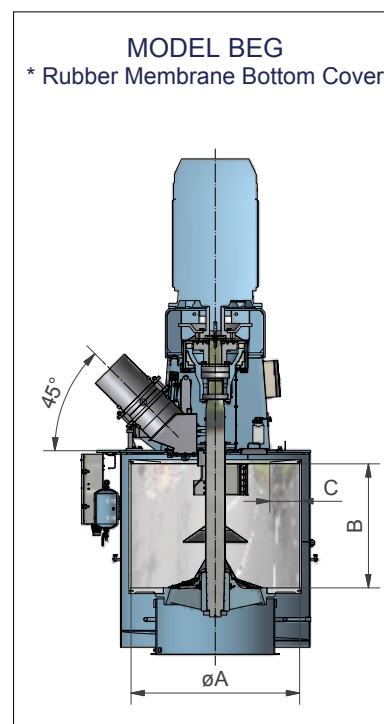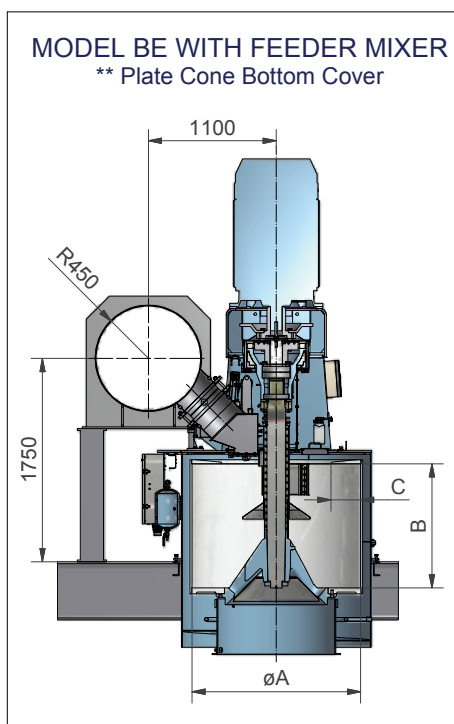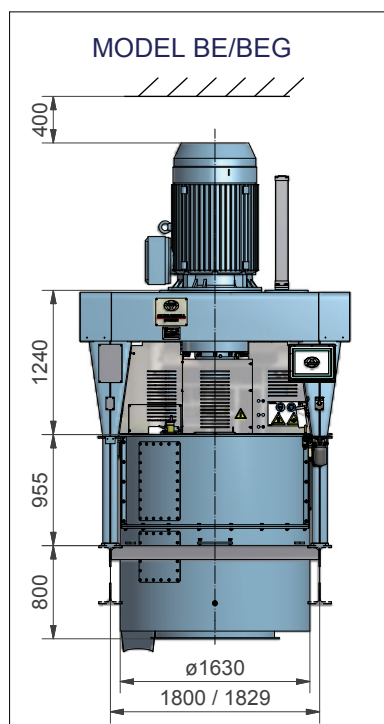

SILVER WEIBULL

Batch Centrifugals are designated after their Geometric charging capacity.

Practical charging capacity can be 10% higher depending on massecuite properties.

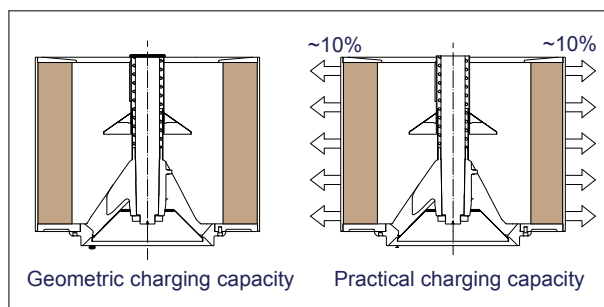

SILVER WEIBULL SWEDEN AB

Industrigatan 15, S-281 43 HÄSSLEHOLM, SWEDEN

Phone: +46 451 38 48 00 Fax: +46 451 158 81 E-mail: info@silver-weibull.se

www.silver-weibull.se